






REF. KTPEVO2





# FULL BODY HARNESS + SHOCK ABSORBER WITH 2 M INTEGRATED WEBBING LANYARD

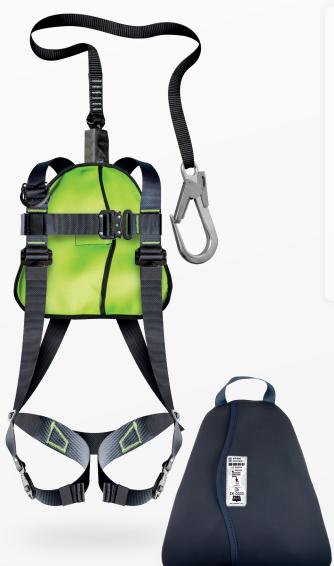





REGULATION

2016 / 425

**CERTIFICATION** 

EN 361: 2002 EN 355: 2002







### **TECHNICAL SPECIFICATIONS**

- · Harness in unique size
- Water repellent webbing in polyester 44 mm (R≥25kN)
- Reversible bag made of fluo neoprene fitted with a comfort back pad
- Shoulder straps adjustment pulling downwards with steel black powder coated quick buckles male/female
- Chest strap 44 mm and legs straps fastening through black zinc plated automatic buckles with locking indicator
- Back fall arrest D ring in metal
- Patented anti-trauma buckles in zinc plated steel
- Removable lanyard-holder
- Large back plate in polypropylene
  - Static resistance ≥ 15 kN
- Energy absorber with a polyamide and polyester tearing strap of 31 mm breadth wrapped with a protective pouch
- Single lanyard in polyester strap, length 2 m, wide 30 mm
- Aluminum connector with large opening 60mm
  - Total weight: 2,75 kg

#### **DESCRIPTION**

The KTP harnesses proposed by NEOFEU are unique on the market: the bag, the harness and the lanyard cannot be dismantled. They provide a complete personal protective system against fall, usable instantly.

The KTP EVO 2 is made up of a full body harness and of a shock absorber with integrated webbing lanyard.

#### **USE**













Industrial maintenance

air-conditionina

construction


Joiner, blind provider


Chimney sweep

Bridge maintenance

## **MINIMUM CLEARANCE** AND FALL FACTORS

REFERENCE	FALL ARRESTER LENGTH	MINIMUM CLEARANCE  Max user  F0 F1 F2			
KTPEVO2	2 m	100 kg	≥ 2,75 m	≥ 4,75m	≥ 6,30 m





FT.KTPEVO2.GB.01 Rev260722